

Multi PRO

Carwash multi-device



Innovation, simplicity and convenience
for your car wash station

Latest Technology for Your Car Wash Business

Multi PRO is the innovative starter for portals and an outdoor change machine. It manages up to 8 washing programs via a 5" touch screen monitor and a vocal guide. Based on state-of-the-art PC architecture, it supports the user to quickly manage multiple tasks, such as starting the wash program, recharging cards and keys, changing money, buy tokens and distributing cards and keys.

Features

- Payment in coins, banknotes, cards and keys. If required, payment can be made with bankcards (chip or contactless)
- Dispense and recharge of cards and keys
- Change banknotes into coins and/or coins into tokens
- Give change in coins and banknotes
- Management of promotional activities to purchase tokens and recharge cards and keys
- Receipt once a transaction is completed or if it does not succeed
- Remote connection using the new CashComplete™ software platform
- Automatic alarms email
- Automatic accounting email
- Barcode reader
- Installation: free-standing or wall-mounted
- Resistant to atmospheric agents

Installed peripherals

- Anti vandal 5" touch screen
- Vocal guide
- Proximity sensor

Optional peripherals


- RM5 HD coin validator
- Currenza C² coin changer (instead of RM5 HD coin validator)
- EuroKey Next cashless system
- 2 dispensers of cards/keys
- 2 NV9 USB+ banknote readers
- 3 Evolution Hoppers
- Credit and debit bankcard reader
- Barcode scanner
- Thermal receipt printer
- Maxi BIO board to manage car wash facilities

Integrated and complete control of the entire car wash station

A single point to activate services, recharge cards/keys, change money, distribute keys/cards and buy tokens or cards/keys



Technical Schematics

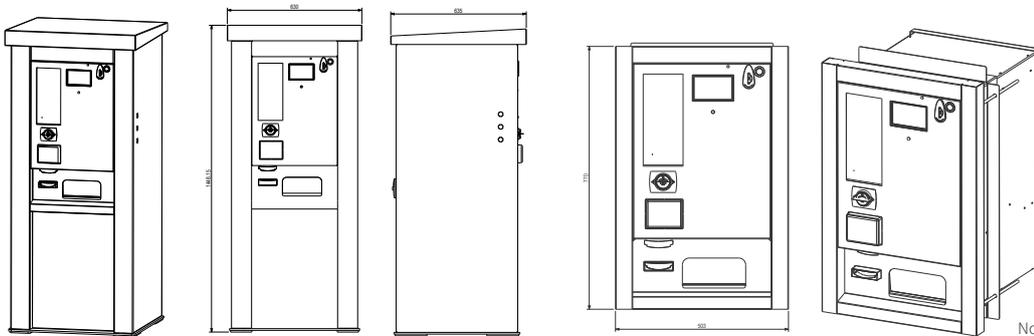

Note: Unit of measure mm

Technical specifications

	Free-standing	Wall-mounted
Dimensions (LxHxD)	630 x 1,448.15 x 590	503 x 770 x 518 mm
Weight	140 Kg	70 kg
Power supply voltage	230 Vac	230 Vac
Current consumption	230 VA	230 VA
Operating temperature	-15°C to 50°C humidity 10% to 90% not condensed	-15°C to 50°C humidity 10% to 90% not condensed

Coin Capacity

	0.5 €	1 €	2 €
1 Evolution hopper	1,500	1,500	1,200
2 Evolution hoppers	3,000	3,000	2,400
3 Evolution hoppers	4,500	4,500	3,600