


Currenza C²

Coin changer and recycler

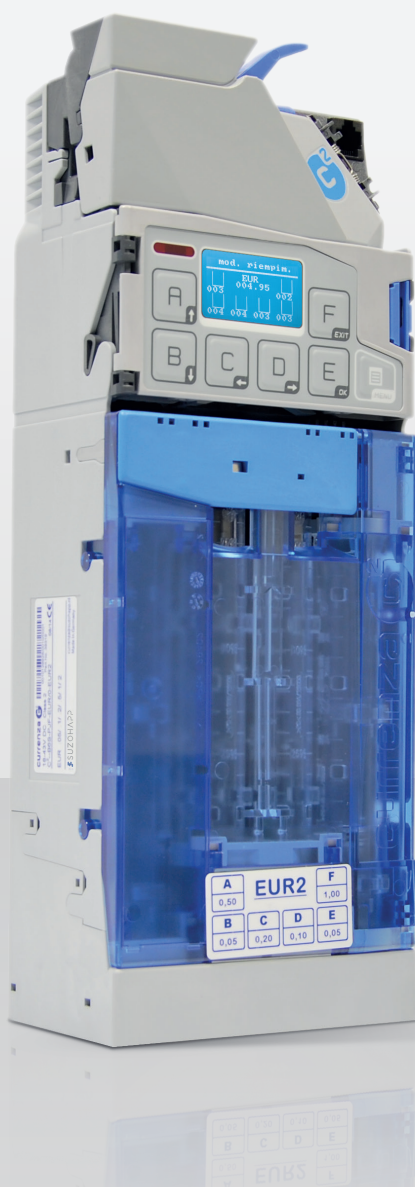


The first and only 6-tubes coin changer
with Payout Redundancy System

Reduce your machine downtime and increase revenues

Currenza C² with PRP (Payout Redundancy Protection) system is specifically designed for the operator: it minimizes machine down time and assures high safety in every applications, making the vending machine more profitable and reliable.

Features

- Acceptance and payout of all circulation coins (also 0,01 €)
- 6 self-filling tubes reducing refilling needs and providing optimum set-up of payout configuration and float level and easy access in case of maintenance
- Modular cassette structure for great freedom in tube configuration
- Payout combination optimization to meet each machine's planogram and site users payment behavior
- High payout speed of up to 6 coins per second and acceptance speed of up to 3 coins/second
- MFT technology providing a more secure coin validation, sensor system to measure up to 40 different parameters
- Easy and fast programming with user-friendly intuitive menu
- Easy access to validation and sorting area for maintenance



PRP System (Payout Redundancy Protection)
6 tubes cassette and 3 independent motors for high payout safety and the minimization of down time

Optional accessories

- External box to connect Currenza C² to small automatic and semi-automatic vending machines

Technical specifications

| | |
|-----------------------|---|
| Dimensions (LxHxW) | 137.75 x 377.10 x 80.00 mm |
| Power supply | BDV: 18V ÷ 43V DC MDB: 18V ÷ 43V DC Battery MDB: 11V ÷ 43V Executive version: 24V AC |
| Power consumption | - Stand-by mode: 2.5V max - Coin payout: 16.0V max – 48V max with 3 motors - Coin acceptance: 16.0V max |
| Operating temperature | -25°C ÷ +80°C |

Tubes combinations

| Diameter (mm) | Tubes | | | | | |
|---------------|-------|---|---|---|---|---|
| | A | B | C | D | E | F |
| 29.0 – 32.5 | • | | | | | |
| 26.5 – 29.0 | • | | • | | | • |
| 24.5 – 26.5 | • | | • | | • | • |
| 23.0 – 24.5 | • | • | • | • | • | • |
| 21.5 – 23.5 | • | • | • | • | • | • |
| 20.0 – 21.5 | | • | • | • | • | • |
| 18.5 – 20.00 | | • | • | • | • | |
| 17.0 – 18.5 | | • | | • | • | |
| 16.0 – 17.0 | | • | | • | • | |
| 15.0 – 16.0 | | • | | • | | |

Versions

- **Blue (EXE, MDB)**
with display and keys
- **White (MDB)**
without keys or display



Tubes capacity

| Coins | Tube capacity |
|-----------------|---------------|
| 2 € | 72 |
| 1 € - 0.50 € | 69 - 67 |
| 0.20 € | 75 |
| 0.10 € - 0.02 € | 83 - 97 |
| 0.05 € | 95 |
| 0.01 € | 97 |